


## Clean the Internal

### Clean the debris tray

- After shutting down, turn up the machine head cover and dust box cover;
- Pull up the dustproof plate and take out the dust bag;
- Open the sealing strip of the dust bag and empty the dust bag;
- Reinstall the dust bag and ensure that the dust plate is lowered;

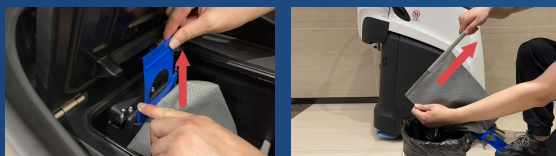

### Clean the air filter element

- Pull the handle of the air filter element to take it out;
- Gently knock the air filter element to remove dust;
- Reloading the air filter element into the square hole;
- Check that the four corners of the air filter element are installed in place;
- Ensure that the handle of the installed air filter element faces outward;



## Clean the bottom

### Clean Side Brushes

- Pinch the base of the side brush and pull it down
- Use a cutter to remove tangled hair
- Hold the side brush and attach it to the axis for installation





### Clean the debris tray

- Open the right door;
- Hold the black handle and pull out the debris tray;
- After dumping garbage, push the debris tray for reloading.



### Cleaning roller brush

- Turn the screws until the cover plate of the roller brush turns up;
- Press down one end of the roller brush to detach the roller brush;
- Cut the winding on the roller brush with a cutter;
- Clean up the rubbish on the roller brush with a hard brush;
- Lift the roller brush to keep upturned and push it into position;
- Ensure accurate alignment between the far end of the roller brush and the rotating shaft;
- Press down the cover plate of the roller brush and screw it tightly;
- Reach out and stir the roller brush to ensure smooth rolling.

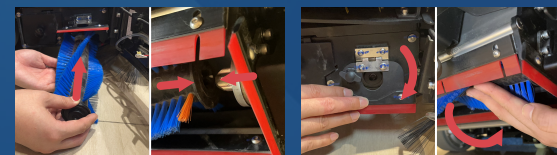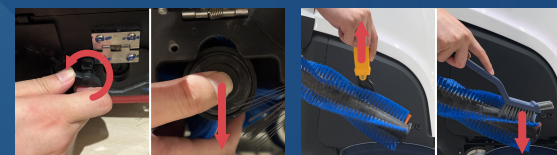

### Clean the Push cloth

- Press the dust mop plate with both hands and pull it out to the rear;
- Separate dust mop cloth, and fully dry it after cleaning;
- Paste dust mop cloth, push it into dust mop plate and absorb it.



## Clean the exterior

### Wipe the exterior

- Use a dry, damp cloth
- Wipe the exterior from top to bottom.



### Wipe sensing element

- Prepare a clean, soft cloth.
- Wipe the front and rear cameras in sequence.
- Wipe the single-line laser above the collision shell.



### Wipe operation screen

- Use a clean, soft cloth.
- Wipe the screen in circles, moving from the inside to the outside.



### Wipe the appearance of the charger

- Cut off the charging pile;
- Use a dry, damp cloth to wipe the exterior.
- Avoid electrode sheets during wiping.

